
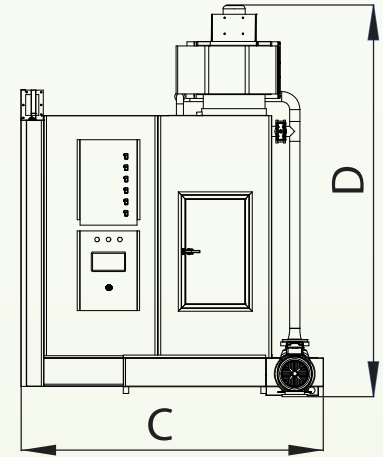


## Spray and Chemical Application Cabinets Without Platform

Platformsuz Sprey ve Kimyasal Uygulama Kabinleri

27

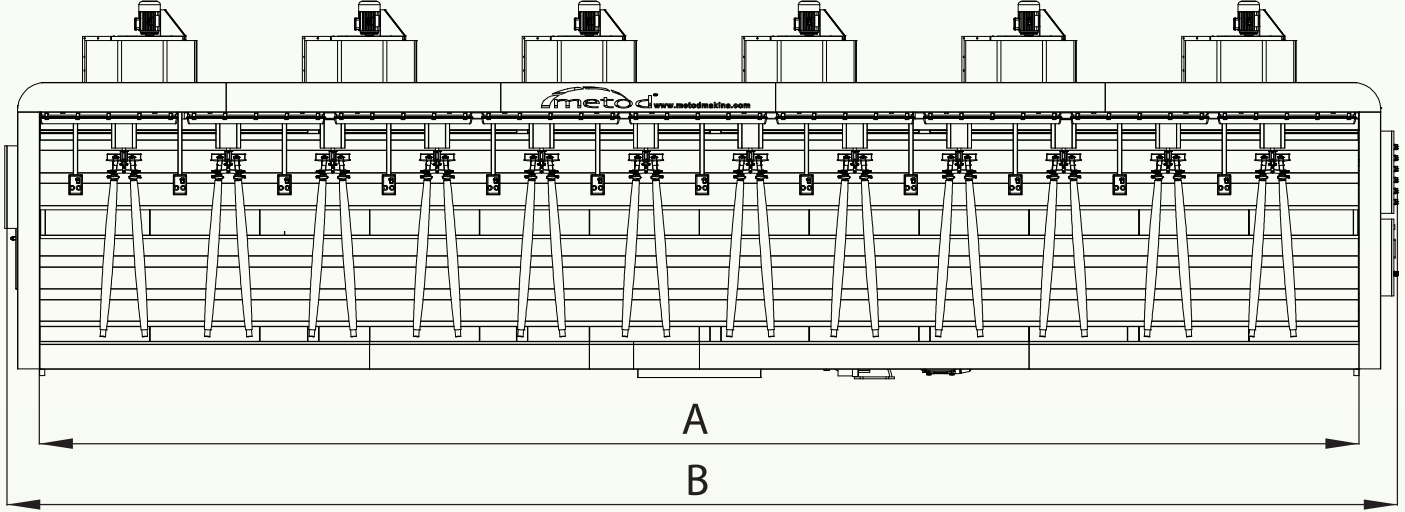

TYPE OF CABINET	A	B	C	D	TOTAL LAYOUT
WSC-6R	6000	6700	2200	3560	6700 x 2200 x 3560
WSC-8R	8000	8400	2700	3560	8400 x 2700 x 3560
WSC-12R	12000	12400	2700	3560	12400 x 2700 x 3560
WSC-16R	16000	16400	2700	3560	16400 x 2700 x 3560

SPECIFICATIONS	WSC-6R	WSC-8R	WSC-12R	WSC-16R
MODEL	WSC-6R	WSC-8R	WSC-12R	WSC-16R
No. Of Manikin	6	8	12	16
Material	AISI 304/316 / 1-1,5-2,5 mm	AISI 304/316 / 1-1,5-2,5 mm	AISI 304/316 / 1-1,5-2,5 mm	AISI 304/316 / 1-1,5-2,5 mm
Manikin	Full Automatic Air Filling & Discharging	Full Automatic Air Filling & Discharging	Full Automatic Air Filling & Discharging	Full Automatic Air Filling & Discharging
Total Fan / Flow	3 x 3kw (3 x 10.000m <sup>3</sup> /h)	4 x 3kw (4 x 10.000m <sup>3</sup> /h)	6 x 3kw (6 x 10.000m <sup>3</sup> /h)	8 x 3kw (8 x 10.000m <sup>3</sup> /h)
Compressed Air	6 Bar	6 Bar	6 Bar	6 Bar
Circulation Pump	304/316 SS 3 kw	304/316 SS 4 kw	304/316 SS 5,5 kw	304/316 SS 7,5 kw
Water Pool Volume	Around 2000 lt.	Around 2750 lt.	Around 4750 lt.	Around 6000 lt.
Weight	2750 kg	3500 kg	5500 kg	6500 kg
Certificate	CE	CE	CE	CE

The above values are not stable and can be changed on Project basis. Yukarıdaki değerler sabit değildir ve Proje bazında değişebilir.